



# N-type i-TOPCon

MONOFACIAL DUAL GLASS MODULE

TSM-XXXNEG18R.28/.20 475-510W

**510<sub>W</sub>** / MAXIMUM POWER OUTPUT

**22.9%** / MAXIMUM EFFICIENCY



## High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Designed for compatibility with existing mainstream system components
- High module power, high string power and low voltage design
- Easy to handle and install on roofs with excellent size and light weight



## High power up to 510W

- Up to 22.9% module efficiency, on 210 innovation platform
- Patented i-TOPCon technology with continuous efficiency improvement, including contact resistance reduction, rear reflection enhancement and edge quality repairment



## Dual-glass design, high reliability


- Less prone to micro-cracks and scratches on the back during installation
- Fire class rating C
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load
- Easy to handle and install on roofs with excellent size and light weight
- NEG18R.28 - Black frame / NEG18R.20 - Silver frame



## High energy yield

- Excellent low irradiation performance, validated by 3rd party
- Lower temperature coefficient (-0.29%/°C) and operating temperature

## Performance Warranty

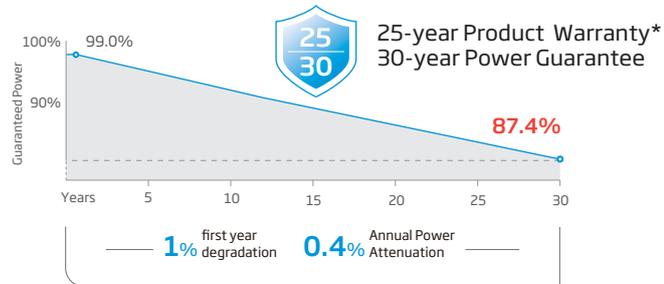

(\*Please refer to Limited Warranty Supplement that applies to the TSM-\*\*\*NEG18R.28/20. Products installed within Australia & New Zealand market.)

## Comprehensive Products and System Certificates

IEC61215/IEC61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© 2024 Trina Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version number: TSM\_EN\_2024\_Aus\_B  
Country of Origin: China



**ELECTRICAL DATA (STC)** TSM-XXXNEG1BR.2B/20(XXX=475-510)

Peak Power Watts- $P_{MAX}(W_p)^*$	475	480	485	490	495	500	505	510
Binning Tolerance- $P_{MAX}(W_p)^*$	0 ~ +5							
Maximum Power Voltage- $V_{MPP}(V)$	32.3	32.5	32.7	32.9	33.1	33.3	33.5	33.7
Maximum Power Current- $I_{MPP}(A)$	14.72	14.77	14.84	14.91	14.97	15.03	15.09	15.14
Open Circuit Voltage- $V_{oc}(V)$	39.0	39.2	39.4	39.6	39.8	40.1	40.3	40.6
Short Circuit Current- $I_{sc}(A)$	15.68	15.72	15.76	15.80	15.83	15.86	15.89	15.93
Module Efficiency $\eta_m(\%)$	21.4	21.6	21.8	22.0	22.3	22.5	22.7	22.9

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Peak Power Watts- $P_{MAX}(W_p)^*$	363	367	371	375	378	382	386	390
Maximum Power Voltage- $V_{MPP}(V)$	30.4	30.6	30.8	31.0	31.3	31.5	31.8	31.9
Maximum Power Current- $I_{MPP}(A)$	11.94	11.98	12.02	12.06	12.08	12.11	12.15	12.21
Open Circuit Voltage- $V_{oc}(V)$	36.9	37.2	37.4	37.6	37.7	38.0	38.3	38.5
Short Circuit Current- $I_{sc}(A)$	12.64	12.67	12.70	12.74	12.76	12.78	12.81	12.84

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.


**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of $P_{MAX}$	-0.29% / °C
Temperature Coefficient of $V_{oc}$	-0.24% / °C
Temperature Coefficient of $I_{sc}$	0.04% / °C

**MAXIMUM RATINGS**


Operational Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	30A

**CURVES OF PV MODULE**

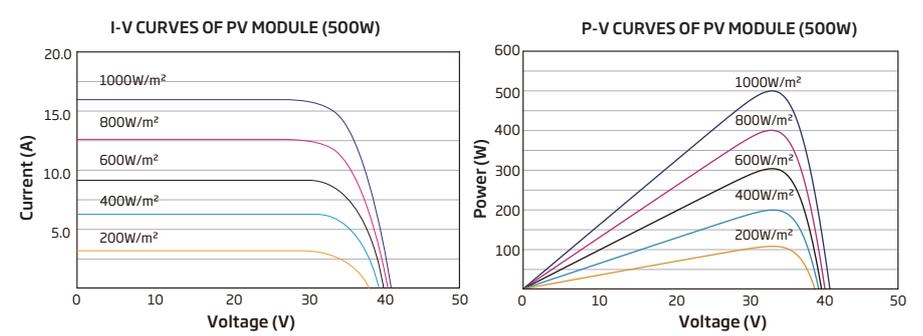

**MECHANICAL DATA**

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	108 cells
Module Dimensions	1961×1134×30 mm (77.20×44.65×1.18 inches)
Weight	23.5 kg (51.8 lb)
Front Glass	1.6mm (0.06inches), High Transmission, AR Coated Heat Strengthened Glass
Back Glass	1.6mm (0.06inches), Heat Strengthened Glass
Frame/Color	30mm (1.18inches) Anodized Aluminium Alloy, (.28 black / .20 silver)
J-Box	IP 6B rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006inches <sup>2</sup> ) Length: 1300/1300 mm (51.1/51.1 inches)
Connector	Stabuli MC4 EV02
Packaging	Modules per box: 36 pieces Modules per 40' container: 864 pieces

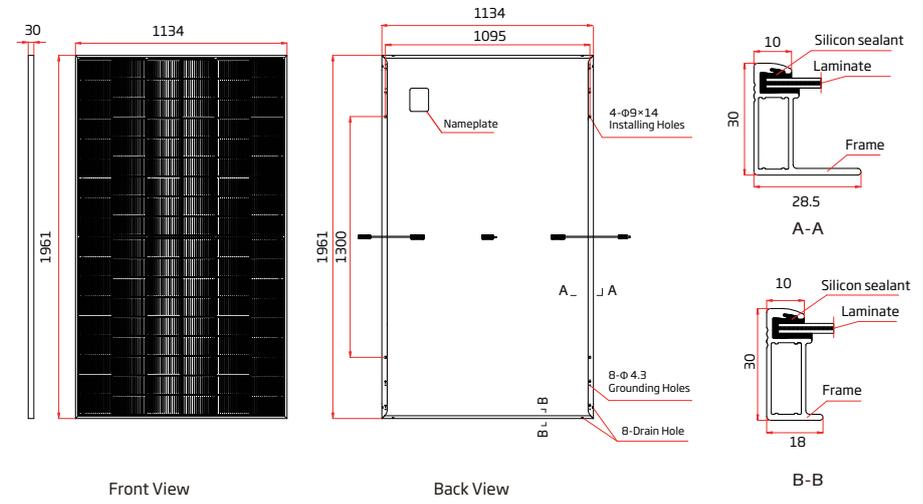

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.  
 © 2024 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.  
 Version number: TSM\_EN\_2024\_Aus\_B  
 Country of Origin: China